





METALLICS






SOLIDS





SOLIDS




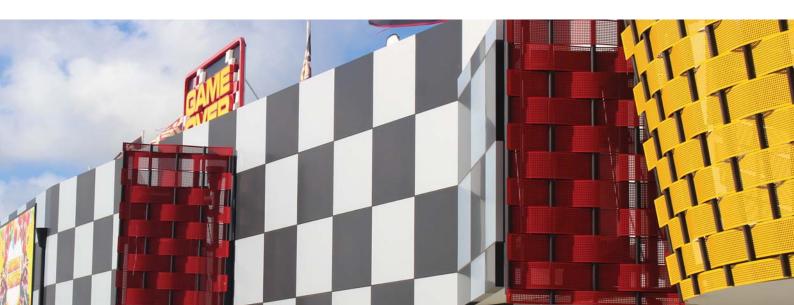



TIMBERS



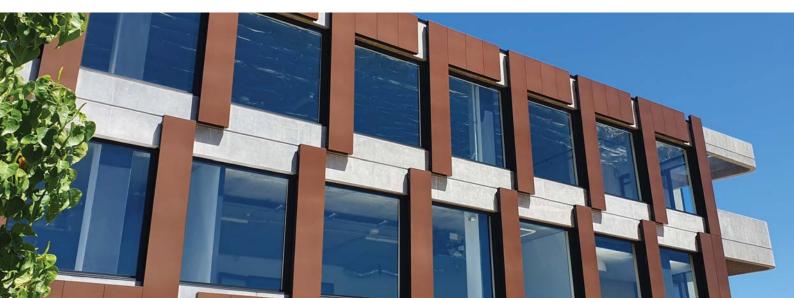



PVDF COATING FINISH PERFORMANCE

Product PVDF - Coil Coating KYNAR 500 Resin

Compliance AAMA 2605-17

Coating Adhesion Class 1

Impact Resistance Struck with 50kg-m weight-distance drops without crack or loss of paint

Abrasion Resistance 5.10L/pm

Pollution Resistance 2.72%

Acid Resistance Immerse surface in 5%HCI for 48hrs without change

Solvent Resistance Cleaned 100 times with MEK by 1kg without change

Cleaning Resistance 10,000 times without change

Salt Spray Resistance Class 1

2 Coat System Minimum 25 Micron

3 Coat System Minimum 33 Micron

PRODUCT WARRANTY

All AODELI products are an ideal choice for long term protection against Australia's harsh environment with its superior PVDF coating systems supported by a 15 Year warranty, when installed by an approved installer. Standard terms and conditions apply.



NOTES:

- 1. Colour samples in this brochure may vary slightly from the actual production due to the application of the paint process.
- 2. Colours between different batches may be slightly different, so it is strongly recommended to place all panels for a project in one order to keep the colour consistency.
- 3. Custom colours are available. For more information consult your local AODELI BDM by phone or email admin@aodeli.com.au
- 4. Colours and stock are subject to availability. To view project references using our range of finishes visit: www.aodeli.com.au

